


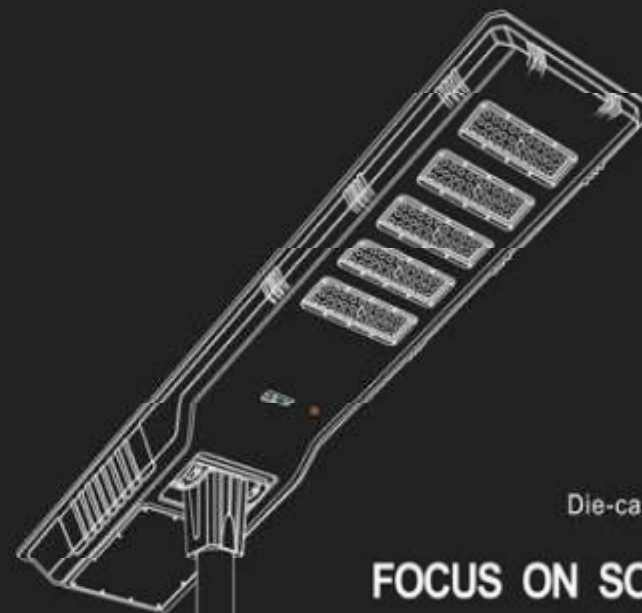

Die-casting aluminum material

FOCUS ON SOLAR GARDEN LANDSCAPE LIGHTS

2025 Version

Misk Technology Inc.

Southerland Way, Fremont, California 94539,

UNITED STATES OF AMERICA

 info@misktech.com  www.misktech.com




SOLAR GARDEN LIGHT

CS - GGD4205



PRODUCT SPECIFICATION

Model No.	CS - GGD4205
Power (Max)	10W
Solar Panel	5V / 10W Mono
Li-Battery	3.2V / 12000mAh
Dimensions	300 * 300 mm
Height	350mm / 1000mm / 1600mm / 2100mm
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - CPD4505	CS - GGD4105	CS - GGD2806
Power (Max)	5W	5W	5W
Solar Panel	5V / 5W Mono	5V / 5W Mono	5V / 5W Mono
Li-Battery	3.2V / 8000mAh	3.2V / 8000mAh	3.2V / 8000mAh
Dimensions	Φ260mm	Φ240mm	235 * 235mm
Height	1000mm / 1600mm / 2000mm		
Working mode	Time control + Lighting control		
Material	Die casting aluminum + PC		



PRODUCT SPECIFICATION

Model No.	CS - GGD2806-2	CS - GGD2806-3
Power (Max)	10W (Double-Head)	15W (Triple-Head)
Solar Panel	5V / 10W Mono	5V / 15W Mono
Li-Battery	3.2V / 16000mAh	3.2V / 24000mAh
Dimensions	2 * (235 * 235mm)	3 * (235 * 235mm)
Height	2600mm	2600mm
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - GGD4505-2	CS - GGD4505-3
Power (Max)	10W (Double-Head)	15W (Triple-Head)
Solar Panel	5V / 10W Mono	5V / 15W Mono
Li-Battery	3.2V / 16000mAh	3.2V / 24000mAh
Dimensions	2 * Φ 240mm	3 * Φ 240mm
Height	2600mm	2600mm
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - GGD4105-2	CS - GGD4105-3
Power (Max)	10W (Double-Head)	15W (Triple-Head)
Solar Panel	5V / 10W Mono	5V / 15W Mono
Li-Battery	3.2V / 16000mAh	3.2V / 24000mAh
Dimensions	2 * Φ 240mm	3 * Φ 240mm
Height	2600mm	2600mm
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS-GGD2601-2	CS-GGD2601-3
Power (Max)	10W (Double-Head)	15W (Triple-Head)
Solar Panel	5V / 10W Mono	5V / 15W Mono
Li-Battery	3.2V / 16000mAh	3.2V / 24000mAh
Dimensions	2 * Φ 260mm	3 * Φ 260mm
Height	2500mm/3000mm	2500mm/3000mm
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - GGD001
Power (Max)	20W
Solar Panel	5V / 20W Mono
Li-Battery	3.2V / 20000mAh
Dimensions	Φ480 * H440mm
install height	3M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS-GGD002	CS-GGD002 PLUS
Power (Max)	12W	20W
Solar Panel	5V / 12W Mono	5V / 20W Mono
Li-Battery	3.2V / 12000mAh	3.2V / 20000mAh
Dimensions	320*320*H330mm	400mm*400mm*H410mm
install height	2.5M	3M
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS-GGD003	CS-GGD003 PLUS
Power (Max)	16W	30W
Solar Panel	5V / 16W Mono	5V / 25W Mono
Li-Battery	3.2V / 16000mAh	3.2V / 30000mAh
Dimensions	Φ410mm*H383mm	Φ530mm*H490mm
install height	2.5M	3M
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - TYD8805
Power (Max)	25W
Solar Panel	5V / 25W Mono
Li-Battery	3.2V / 30000mAh
Dimensions	480*480*H368mm
install height	3M / 4M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - TYD1104
Power (Max)	25W
Solar Panel	5V / 25W Mono
Li-Battery	3.2V / 30000mAh
Dimensions	Φ530 * H440mm
install height	3M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - GGD1105
Power (Max)	30W
Solar Panel	5V / 28W Mono
Li-Battery	3.2V / 36000mAh
Dimensions	Φ530 * H580mm
install height	4M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - GGD006
Power (Max)	20W
Solar Panel	5V / 20W Mono
Li-Battery	3.2V / 20000mAh
Dimensions	Φ480 * H405mm
install height	4M
Working mode	Time control + Lighting control
Material	Die casting aluminum+PC(milky white or transparent)



PR

Model No.	CS - TYD3218
Power (Max)	30W
Solar Panel	5V / 25W Mono
Li-Battery	3.2V / 30000mAh
Dimensions	Φ536 * H327mm
install height	4M
Working mode	Time control + Lighting control
Material	Die casting aluminum+PC(milky white or transparent)



PRODU

Model No.	CS - TYD1218
Power (Max)	30W
Solar Panel	5V / 25W Mono
Li-Battery	3.2V / 30000mAh
Dimensions	480*480*H284mm
install height	4M
Working mode	Time control + Lighting control
Material	Die casting aluminum+PC(milky white or transparent)



PRODUCT SPECIFICATION

Model No.	CS-GGD005	CS-GGD005 PLUS
Power (Max)	30W	50W
Solar Panel	5V / 30W Mono	5V / 45W Mono
Li-Battery	3.2V / 30000mAh	3.2V / 45000mAh
Dimensions	Φ500mm*H140mm	Φ600mm*H145mm
install height	3M	4M/5M
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - TYD2705
Power (Max)	20W
Solar Panel	5V / 20W Mono
Li-Battery	3.2V / 20000mAh
Dimensions	Φ480 * H410mm
install height	3M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC




PRODUCT SPECIFICATION

Model No.	CS - GGD2403
Power (Max)	20W
Solar Panel	5V / 20W Mono
Li-Battery	3.2V / 20000mAh
Dimensions	400 * 400 * H420mm
install height	3M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - TYD2808
Power (Max)	40W
Solar Panel	5V / 36W Mono
Li-Battery	3.2V / 60000mAh
Dimensions	700 * 520 * H665mm
install height	4M / 5M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC

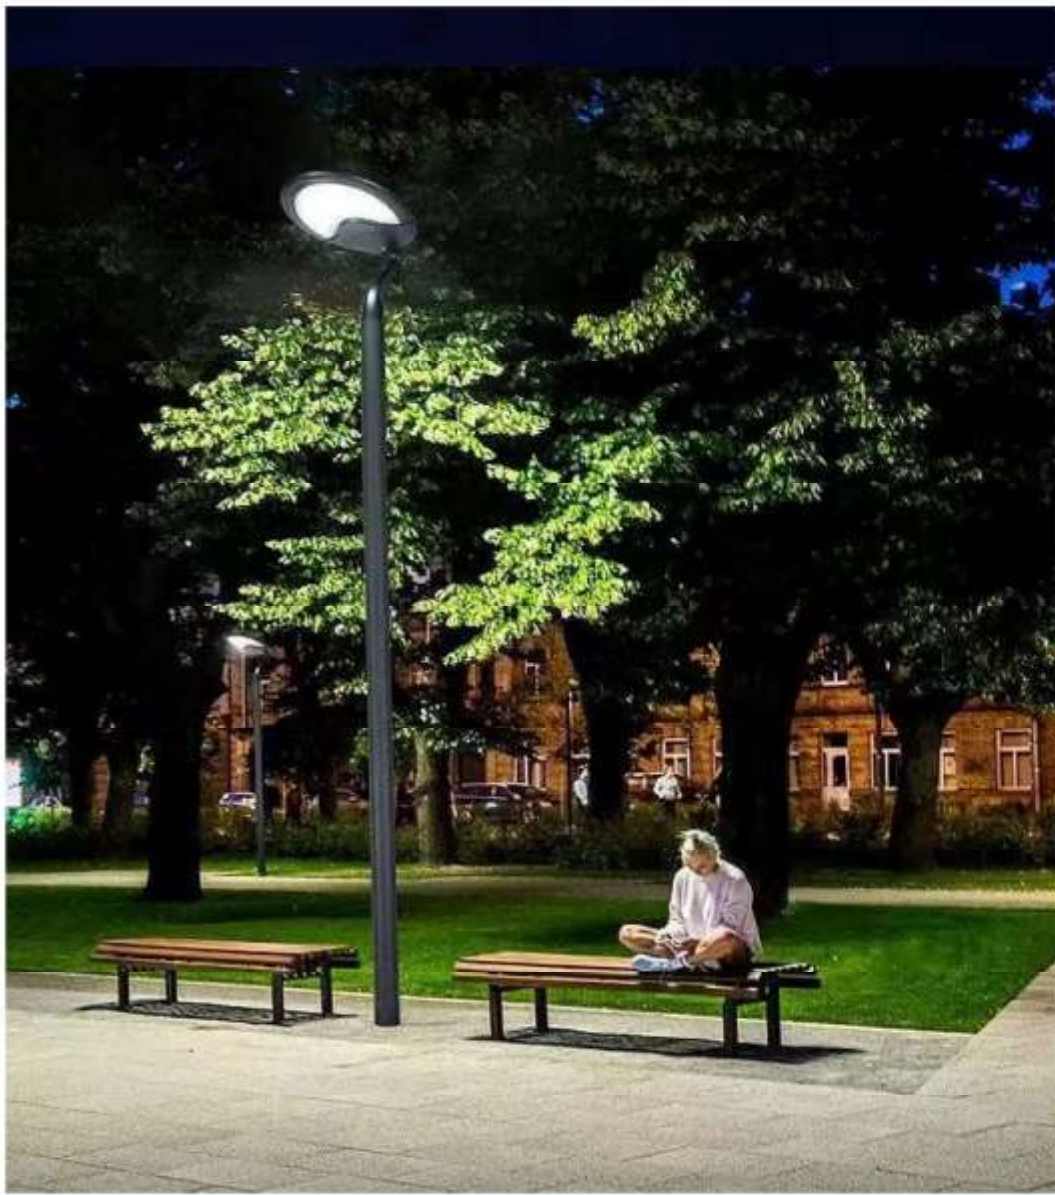

PRODUCT SPECIFICATION

Model No.	CS - TYD5108
Power (Max)	25W
Solar Panel	5V / 25W Mono
Li-Battery	3.2V / 36000mAh
Dimensions	630 * 435 * H495mm
install height	3M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - GGD0805
Power (Max)	30W
Solar Panel	5V / 32W Mono
Li-Battery	3.2V / 45000mAh
Dimensions	560 * 560 * H230mm
install height	4M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - TYD2505
Power (Max)	45W
Solar Panel	5V / 50W Mono
Li-Battery	3.2V / 60000mAh
Dimensions	580 * 580 * H255mm
install height	4M / 5M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - TYD2806
Power (Max)	30W
Solar Panel	5V / 30W Mono
Li-Battery	3.2V / 45000mAh
Dimensions	Φ585 * H215mm
install height	4M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - TYD2609
Power (Max)	40W
Solar Panel	5V / 35W Mono
Li-Battery	3.2V / 45000mAh
Dimensions	Φ585 * H550mm
install height	4M / 5M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - CPD0406
Power (Max)	2W
Solar Panel	5V/2W Mono
Li-Battery	3.2V / 3000mAh
Dimensions	160 * 160mm
Height	200mm / 550mm
Installation	Spike base / Square base
Material:	ABS plastic body (sun-proof)



PRODUCT SPECIFICATION

Model No.	CS - CPD0304	CS - CPD0907	CS - CPD0804
Power (Max)	2W		
Solar Panel	5V/2W Mono		
Li-Battery	3.2V / 3000mAh		
Dimensions	Φ185mm		
Height	225mm / 550mm		
Installation	Spike base / Square base		
Material:	Die-casting aluminum + PC		



PRODUCT SPECIFICATION

Model No.	CS - CPD0501
Power (Max)	3W
Solar Panel	5V/3W Mono
Li-Battery	3.7V / 4400mAh
Dimensions	Φ205mm
Height	170mm / 600mm / 800mm
Installation	Spike base / Ball base
Material:	Die-casting aluminum + PC (Milky white or Transparent)



PRODUCT SPECIFICATION

Model No.	CS - CPD3004 (Round)	CS - CPD5004 (Square)
Power (Max)	5W	5W
Solar Panel	5V / 4.5W Mono	5V / 4.5W Mono
Li-Battery	3.2V / 6400mAh	3.2V / 6400mAh
Dimensions	Φ230mm	200 * 200mm
Height	300mm / 600mm / 800mm	400mm / 600mm / 800mm
Installation	Ball base	
Material:	Die-casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - CPD2106	CS - CPD1106
Power (Max)	5W	5W
Solar Panel	5V / 4.5W Mono	5V / 4.5W Mono
Li-Battery	3.2V / 8000mAh	3.2V / 8000mAh
Dimensions	Φ240mm	235 * 235mm
Height	380mm / 680mm / 880mm	275mm / 600mm / 800mm
Installation	Ball base	
Material:	Die-casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - CPD4104	CS - CPD2204
Power (Max)	5W	5W
Solar Panel	5V / 4.5W Mono	5V / 4.5W Mono
Li-Battery	3.2V / 8000mAh	3.2V / 8000mAh
Dimensions	Φ260mm	Φ260mm
Height	250mm / 680mm / 880mm	250mm / 650mm / 850mm
Installation	Ball base	
Material:	Die-casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - CPD5405	CS - CPD1004
Power (Max)	5W	5W
Solar Panel	5V / 4.5W Mono	5V / 4.5W Mono
Li-Battery	3.2V / 8000mAh	3.2V / 8000mAh
Dimensions	Φ260mm	Φ260mm
Height	260mm / 500mm / 750mm	280mm / 450mm / 700mm
Installation	Spick base or Ball base	
Material:	Die-casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - CPD2104
Power (Max)	5W
Solar Panel	5V / 4.5W Mono
Li-Battery	3.2V / 8000mAh
Dimensions	Φ260mm
Height	310mm / 500mm / 750mm
Installation	Spick base or Ball base
Material:	Die-casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - CPD2804	CS - CPD8804	CS - CPD3008
Power (Max)	5W	5W	5W
Solar Panel	5V / 5W Mono	5V / 5W Mono	5V / 5W Mono
Li-Battery	3.2V / 6400mm	3.2V / 8000mm	3.2V / 8000mm
Dimensions	235*235mm	Φ260mm	257mm
Height	600mm / 800mm / 1000mm		
Installation	Ball base		
Material:	Die-casting aluminum + PC		



PRODUCT SPECIFICATION

Model No.	CS - CPD3202	CS - CPD1201
Power (Max)	5W	5W
Solar Panel	5V / 5W Mono	5V / 5W Mono
Li-Battery	3.2V / 8000mAh	3.2V / 8000mAh
Dimensions	Φ260mm	235*235mm
install height	400mm / 600mm / 800mm	400mm / 600mm / 800mm
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	




PRODUCT SPECIFICATION

Model No.	CS - CPD1008
Power (Max)	5W
Solar Panel	5V / 4.5W Mono
Li-Battery	3.2V / 8000mAh
Dimensions	235*235mm
Height	310mm / 400mm / 600mm / 800mm
Installation	Spick base or Ball base
Material:	Die-casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - CPD1107
Power (Max)	5W
Solar Panel	5V / 4.5W Mono
Li-Battery	3.2V / 8000mAh
Dimensions	Φ260mm
Height	250mm / 400mm / 600mm / 800mm
Installation	Spick base or Ball base
Material:	Die-casting aluminum + PC

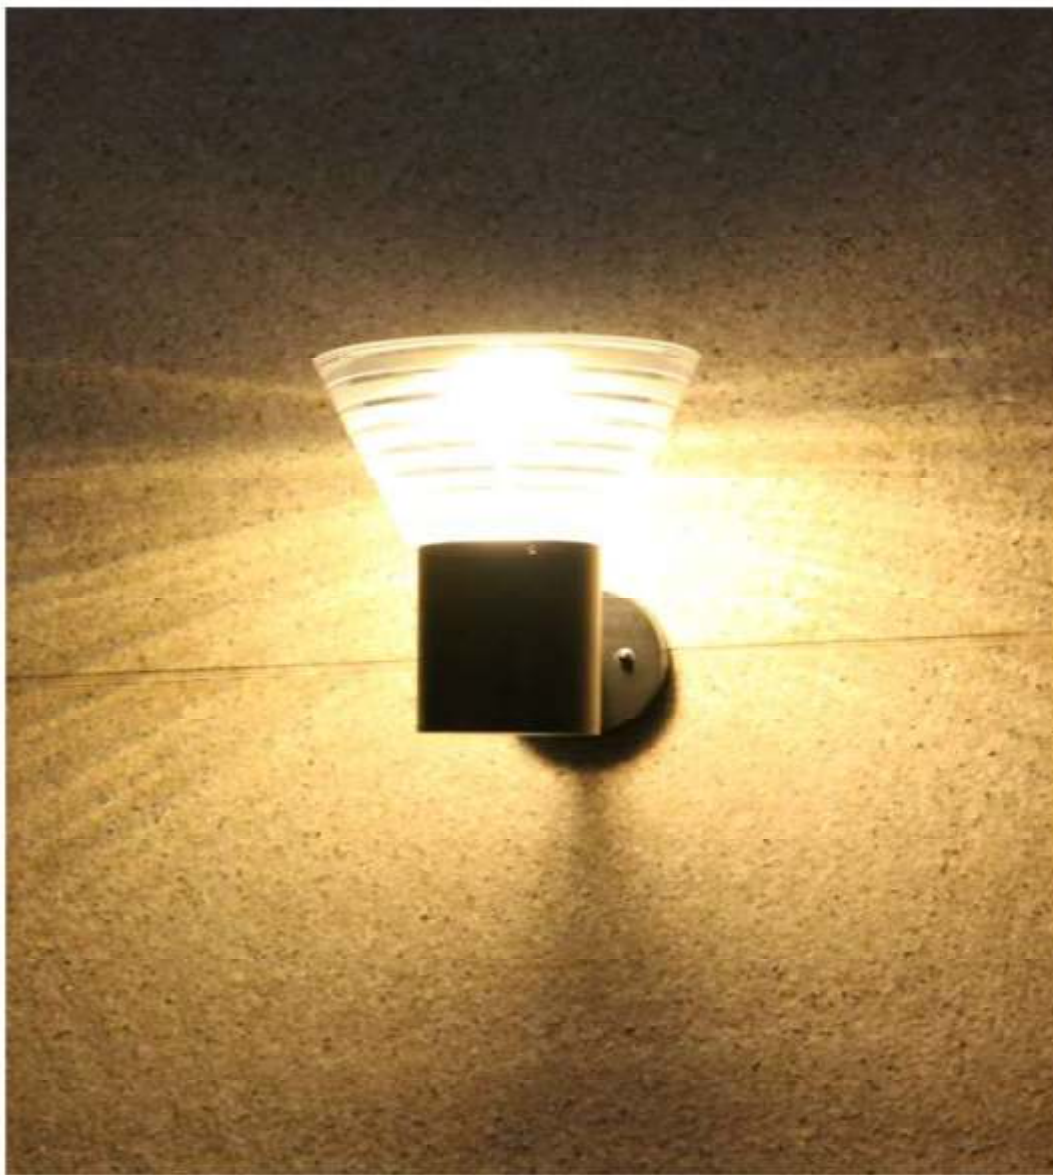

PRODUCT SPECIFICATION

Model No.	CS - BD3001	CS - BD6001
Power (Max)	5W	5W
Solar Panel	5V / 5W Mono	5V / 5W Mono
Li-Battery	3.2V / 6400mAh	3.2V / 6400mAh
Dimensions	Φ230mm	200 * 200mm
CCT (k)	3000K / 4500K / 6000K	Adjustable 3000K / 6000K
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - BD4001	CS - BD1104
Power (Max)	5W	5W
Solar Panel	5V / 5W Mono	5V / 5W Mono
Li-Battery	3.2V / 8000mAh	3.2V / 8000mAh
Dimensions	Φ260mm	Φ260mm
CCT (k)	3000K / 4500K / 6000K	3000K / 4500K / 6000K
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - BD4005	CS - BD1004
Power (Max)	5W	5W
Solar Panel	5V / 5W Mono	5V / 5W Mono
Li-Battery	3.2V / 8000mAh	3.2V / 8000mAh
Dimensions	Φ260mm	Φ260mm
CCT (k)	3000K / 4500K / 6000K	3000K / 4500K / 6000K
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - BD2106-L	CS - BD2106-U
Power (Max)	5W	5W
Solar Panel	5V / 5W Mono	5V / 5W Mono
Li-Battery	3.2V / 8000mAh	3.2V / 8000mAh
Dimensions	Φ240mm	Φ240mm
CCT (k)	3000K / 4500K / 6000K	3000K / 4500K / 6000K
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	




PRODUCT SPECIFICATION

Model No.	CS - BD1008	CS - BD1006
Power (Max)	5W	5W
Solar Panel	5V / 5W Mono	5V / 5W Mono
Li-Battery	3.2V / 8000mAh	3.2V / 8000mAh
Dimensions	Φ260mm	150*235mm
CCT (k)	3000K / 4500K / 6000K	3000K / 4500K / 6000K
Working mode	Time control + Lighting control + PIR	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS - CPD1102
Power (Max)	11W
Solar Panel	5V / 11W Mono
Li-Battery	3.2V / 10000mAh
Dimensions	10M strip light
CCT (k)	Yellow light / Warm light / White light
Working mode	Time control + Lighting control
Material	ABS plastic body (sun-proof)

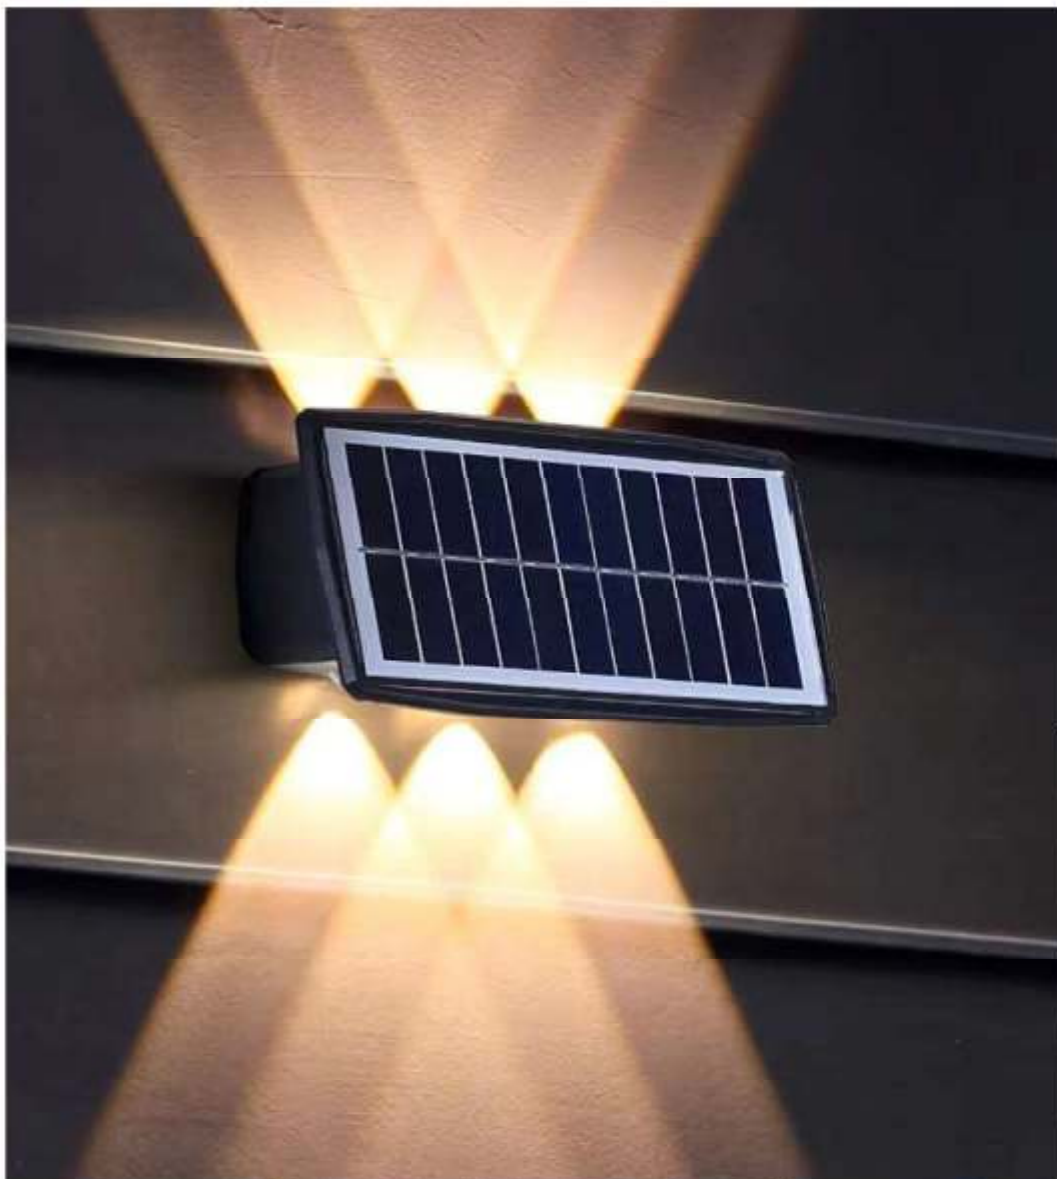

PRODUCT SPECIFICATION

Model No.	CS - BDW4	CS - BDW6
Power (Max)	4W	6W
Solar Panel	5.5V / 275mA Mono	5.5V / 500mA Mono
Li-Battery	3.7V / 1500mAh	3.7V / 2000mAh
Dimensions	155 * 98 * 60mm	205 * 98 * 60mm
CCT (k)	3000K / 6000K / RMB	3000K / 6000K / RMB
Working mode	Time control + Lighting control	
Material	ABS plastic body (sun-proof)	



PRODUCT SPECIFICATION

Model No.	CS - XC060	CS - XC120
Power (Max)	18W	36W
Solar Panel	5V / 22W Mono	5V / 40W Mono
Li-Battery	3.2V / 30000mAh	3.2V / 50000mAh
Dimensions	590 * 200 * 50mm	1155 * 200 * 50mm
CCT (k)	3000K / 6000K	3000K / 6000K
Working mode	Time control + Lighting control	
Material	Die casting aluminum + PC	



PRODUCT SPECIFICATION

Model No.	CS -DMD8125	DMD1201
LED Power	12W LED Philips 130lm/W	4W / 8W LED
Solar Panel	5V / 2W Mono	5.5V / 1.7W Mono
Li-Battery	3.7V / 2000mAh	3.7V / 2000mAh
Dimensions	Φ125 * H30mm	Φ180mm * H45mm
CCT (k)	Yellow / White / Red / Green / Blue	Yellow / White / RGB
Working mode	Time control + Lighting control	Time control + Lighting control
Material	Die casting aluminum + PC	ABS + PC



PRODUCT SPECIFICATION

Model No.	C3 - BW20W	C3 - BW30W	C3 - BW50W
Power (Max)	20W	30W	50W
Solar Panel	5V / 30W	6V / 40W	6V / 50W
Li-Battery	3.2V / 30AH	3.2V / 45AH	3.2V / 60AH
LED Chips	Philips LED 96pcs	Philips LED 120pcs	Philips LED 150pcs
Dimensions	295*210*70mm	350*250*70mm	405*290*70mm
Working mode	MPPT control + Time control + Lighting control		
Material	Die casting aluminum		



PRODUCT SPECIFICATION

Model No.	CS - TYD5005-6
Power (Max)	100W
Solar Panel	5V / 96W Mono
Li-Battery	3.2V / 120000mAh
Dimensions	1660 * 435mm
install height	8M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - TYD5109-6
Power (Max)	150W
Solar Panel	5V / 150W Mono
Li-Battery	3.2V / 180000mAh
Dimensions	2050 * 450mm
install height	10M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - TYD5106-6
Power (Max)	65W
Solar Panel	5V / 65W Mono
Li-Battery	3.2V / 66000mAh
Dimensions	6 * Φ350mm
install height	5M
Working mode	Time control + Lighting control
Material	Die casting aluminum + PC



PRODUCT SPECIFICATION

Model No.	CS - ZF002	CS - ZF003	CS - ZF004
Power	200W	300W	400W
Solar Panel	5V / 30W Mono	5V / 40W Mono	5V / 50W Mono
Battery	3.2V / 20AH	3.2V / 30AH	3.2V / 40AH
Dimensions	507*239*56mm	554*266*56mm	554*266*56mm
Install height	4M	5M	6M
Working mode	12hour/days		
Material	Die-casting aluminum		



PRODUCT SPECIFICATION

Model No.	C3 - LD8060	C3 - LD8090	C3 - LD8120
Power (Max)	60W	90W	120W
Solar Panel	18V / 60W	18V / 90W	18V / 120W
Li-Battery	3.2V / 80AH	3.2V / 120AH	3.2V / 160AH
LED Chips	90pcs	120pcs	150pcs
Dimensions	823*416*200mm	1180*416*200mm	1590*416*200mm
Working mode	MPPT control + Time control + Lighting control		
Material	All in one - Die casting aluminum		

ALL-IN-ONE SOLAR STREET LIGHT


Easy Installation
High Brightness
Zero Power Consumption




	CODE	POWER		SPECIFICATION	Material
	BH-SL-2410	300W	PRODUCT SIZE	707*266*60mm	ABS HOUSING HIGH BRIGHTNESS WITH BATTERY DISPLAY
			LEDS	54PCS SMD 5054 3000k-6500K	
			BATTERY	LiFe PO4 3.2V 24Ah	
			PANEL	monocrystalline 5V/22W	
	BH-SL-2410	400W	PRODUCT SIZE	830*266*60mm	ABS HOUSING HIGH BRIGHTNESS WITH BATTERY DISPLAY
			LEDS	72 PCS SMD 5054 3000k-6500K	
			BATTERY	LiFe PO4 3.2V 30Ah	
			PANEL	monocrystalline 5V/28W	



300W

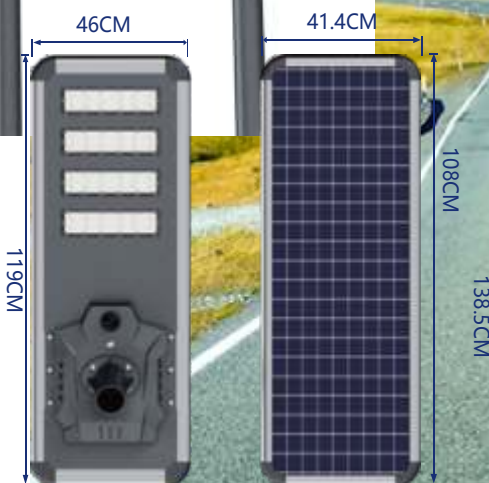

400W

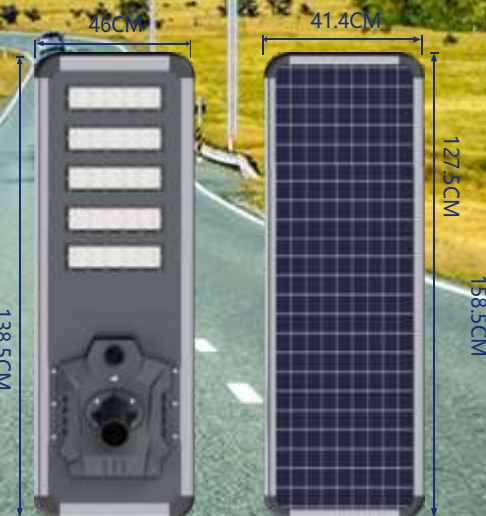

500W



600W



Model:	BH-SL3601			
Power:	300W	400W	500W	600W
Raw material:	Aluminum profile + die-cast aluminum battery box			
Dimension:	1000*460*95 mm	1190*460*95mm	1385*460*95mm	1585*460*95mm
Solar panel:	6V/70W	6V/80W	6V/100W	6V/120W
PV cell type:	Lithium iron phosphate (LiFePO4)			
Lumen:	5000LM	7000LM	9000LM	11000LM
Battery size:	3.2V/7000MAh	3.2V/8000MAh	3.2V/10000MAh	3.2V/112000MAh
LED :	3030SMD			
LED Qty:	180PCS	240PCS	300PCS	360PCS
Panel size:	414*990mm	414*1080mm	414*1275mm	414*1485mm
Weight :	9KG	11KG	13KG	15KG
CCT:	6500K			
Motion sensor:	NO			
Light mode:	Radar sensor + switch + automatic light control + side blue light			
Charge time & back up days:	6-8 Hours charge , whole night discharge , 1-2 days raining day back up			
Work Temp:	-10°C — 50°C			
Certificate:	CE/CB			
Warranty:	2 Years			



PRODUCT SPECIFICATION

Model No.	Φ220 ~ Φ76mm Split type Pole
Material	Q235 galvanized pipe
Bottom Pole	Φ220 * T2.0mm (T: thickness)
Main Pole	Φ76 * T2.0mm
Height	3M / 4M / 5M / 6M
Base Flange	280 * 280 * T2.0mm
Installation	Screw or Buried steel frame
Colour	Frosted black (other colors available upon request)



PRODUCT SPECIFICATION

Model No.	Φ114 ~ Φ76mm Split type Pole
Material	Q235 galvanized pipe
Bottom Pole	Φ114 * T2.0mm (Thickness 1.5 / 1.8 / 2.0 / 2.5mm)
Main Pole	Φ76 * T2.0mm (Thickness 1.5 / 1.8 / 2.0 / 2.5mm)
Height	3M / 4M / 5M / 6M
Base Flange	220 * 220 * T8.0mm
Installation	Screw or Buried steel frame
Colour	Frosted black or (Blue + White)



PRODUCT SPECIFICATION

Model No.	Φ114 ~ Φ76mm Split type Pole
Material	Q235 galvanized pipe
Bottom Pole	Φ114 * T2.0mm
Main Pole	Φ76 * T2.0mm
Height	3M / 4M / 5M / 6M
Base Flange	220 * 220 * T8.0mm
Installation	Screw or Buried steel frame
Colour	Frosted black



PRODUCT SPECIFICATION

Model No.	Φ138 ~ Φ114 ~ Φ89mm Split type Pole
Material	Q235 galvanized pipe
Bottom Pole	Φ138 * T2.0mm + Φ114 * T2.0mm
Main Pole	Φ76 * T2.0mm
Height	8M
Base Flange	280 * 280 * T12.0mm
Installation	Buried steel frame
Colour	Frosted black



PRODUCT SPECIFICATION

Model No.	Φ60mm Equal-Diameter Split type Pole
Material	Q235 galvanized pipe
Bottom Pole	Φ60* T1.5mm
Main Pole	Φ60 * T1.5mm
Height	2M / 3M / 4M
Base Flange	150 * 150 * T6.0mm
Installation	Screw or Buried steel frame
Colour	Frosted black



PRODUCT SPECIFICATION

Model No. **Φ114 ~ Φ76mm All in one pole**

Material Q235 galvanized pipe

Pole Size Φ114 * T2.0mm + Φ76 * T2.0mm

Thickness 1.2 / 1.5 / 1.8 / 2.0 / 2.5 / 3.0mm - optional

Height 3M / 4M / 5M / 6M

Base Flange 220 * 220 * T8.0mm

Installation Screw or Buried steel frame

Colour Frosted black



PRODUCT SPECIFICATION

Model No.	Φ220 ~ Φ76mm All in one pole
Material	Q235 galvanized pipe
Pole Size	Φ114 * T2.0mm + Φ76 * T2.0mm
Thickness	A-B-C-D-E-F (grain pattern is optional)
Height	3M / 4M / 5M / 6M
Base Flange	280 * 280 * T2.0mm
Installation	Screw or Buried steel frame
Colour	Frosted black